


NDI




## Feature

- ※ 1/1.8" high quality CMOS sensor, up to 4K @ 30fps resolution
- ※ Support NDI|HX output
- ※ 4K wide angle lens, 12x optical zoom, maximum 82° FOV
- ※ H.265, H.264 video compression, output 4K compressed digital video
- ※ Outputs 4K uncompressed digital video
- ※ HDMI, 3G-SDI, USB3.0, Ethernet and optional HD Base T outputs
- ※ Dual stream, supports multi-level image quality configuration
- ※ 1 audio input
- ※ TF card supports maximum 64G storage
- ※ VISCA in and out, Daisy Chain, PELCO-P, PELCO-D
- ※ OLED screen to display necessary information
- ※ Desktop and wall mounting options

## Dimensions

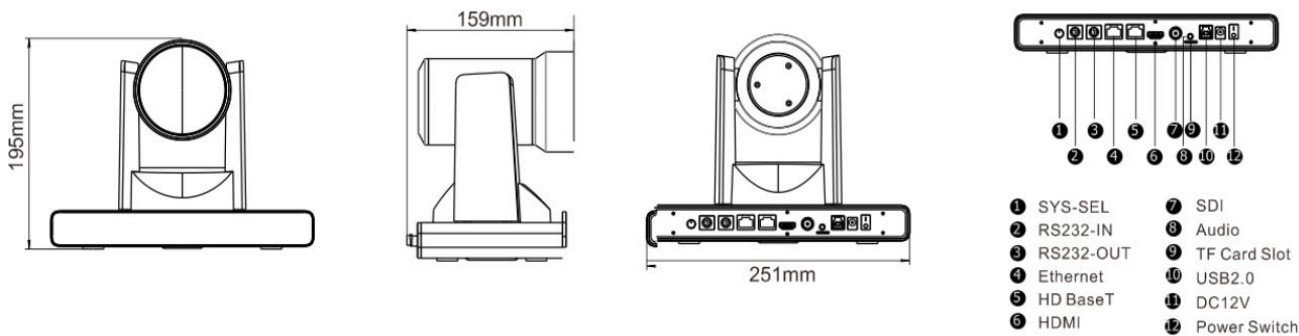

## Accessories



Wall Bracket

## Technical Specification

<b>Model No.</b>	<b>AMC-NH1202</b>
<b>Camera</b>	
Image Sensor	1/1.8" CMOS 8.41MP
Lens	f=4.2mm-50.4mm, F1.8-F2.8
Optical Zoom	12X
Digital Zoom	12X
Field of View	82.6° - 8°
Focus	Auto, Manual, PTZ Push, One Push
Shutter Speed	1/25 - 1/10,000s
AGC	Auto/Manual
White Balance	Auto, Indoor, Outdoor, One Push, Manual, Auto Track
AE Control	Auto, Manual, Shutter Priority, Iris Priority
S/N Ratio	Above 50dB
DNR	2D / 3D
BLC	Yes
WDR	Yes
<b>PTZ</b>	
Pan Rotation Angle	- 170° - +170°
Tilt Roation Angle	- 30° - + 90°
Pan Rotation Speed	0° - 120° /s
Tilt Rotation Speed	0.1° - 80° /s
Preset Number	255
OSD Menu	Yes
Image Flip	Yes
<b>Video Format</b>	
Video Output	4K@30fps, 4K@25fps, 1080P60,1080P50, 1080I60,1080I50. 1080P30,1080P25, 720P60,720P50
<b>Network</b>	
Max. Image Size	<a href="#">4K@30fps</a>
Video Compression	H.264/H.265
Audio Compression	AAC
Protocol	HTTP, RTSP, RTMP, RTP, TCP,UDP, ONVIF
Dual Stream	Support
<b>USB</b>	
Max. Image Size	3840*2160 @ 30fps
Video Compression	H.264,H.265, MJPEG
USB Audio	Support
UVC Protocol	UVC1.0 - UVC1.5
UVC PTZ	Support
<b>Interface</b>	
Video Output Interface	HDMI, SDI, HDBaseT(optional)
Audio Input Interface	Line in
Audio Output Interface	Line out
Ethernet Interface	10/100/1000M(NDI   HX), POE(optional)
USB Interface	USB3.0
Control Interface	RS-RS232IN, RS-232OUT, RS-485
TF Card	Max. 64G
<b>General</b>	
Power Supply	DC12V
Power Consumption	Below 20W
Working Temperature	-10°C - +40°C
Storage Temperature	-20°C - +60°C
Dimension(W x H x L)	251mm x 159mm x 195mm
Net Weight	1.5kg
Color	Grey

\*\*\*Product specification are subject to change without notice\*\*\*