



UHV-4XD-U2S USB2.0 HD Video Conference Camera



UHV-4XD-U2S is an enterprise level high video quality HD PTZ Camera at affordable cost, give you a perfect solution for cloud-conferencing, mini meeting room video capture.

Pro-level HD Video Quality

- ※ Advanced industrial level ISP, SONY 1/2.8" 5MP image sensor, 4K optical lens with 4x digital zoom, to provide ultra crystal and smooth video experience
- ※ 1920x1080p 30fps full HD resolution
- ※ 82.5 degree wide angle of viewing

Smooth & Accurate PTZ Movement

Compact & stable mechanical design, to ensure the quite, smooth, accurate pan tilt movement


Plug & Play Design

- ※ USB 2.0 output, single USB cable connection, can start quick video call with any video conference software
- ※ Support FECC(Far End Camera Control)

Easy Control

- ※ Standard Sony Visca and UVC 1.5 protocol, RS232/RS485 control
- ※ Upgradable firmware
- ※ Image flip function support upside-down installation

Dimensional Drawing(mm)

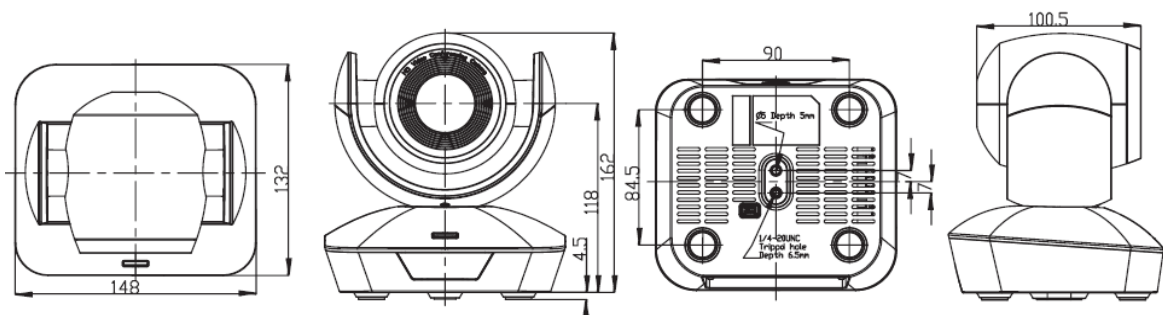

Technical Specification

Model No.	UHV-4XD-U2S
Camera	
Sensor	1/2.8" inch high quality, SONY CMOS sensor, 5MP
Video System	1920x1080p30/25/20/15/10/5 1280x720p30/25/20/15/10/5 720x576p30/25/20/15/10/5 640x480p30/25/20/15/10/5 320x240p30/25/20/15/10/5

Video Format	MJPG/H.264
Zoom	4x digital zoom
View Angle	82.5°
Focal Length	F=2.7mm
Minimum Lux	0.1Lux
S/N Rate	Above 50dB
Focus	Fixed Focus
Iris	Fixed Iris
White Balance	Auto/Manual/Indor/Outdoor/Push/Sodium/Fluorescent
Electronic Shutter	Auto/Manual
BLC	Auto/Manual
Mechanism	
Pan Rotation Angle	- 170° - +170°
Tilt Roation Angle	- 30° - + 90°
Pan Rotation Speed	0° - 30° /s
Tilt Rotation Speed	0° - 30° /s
Preset	128 via RS232 contorl, 10 via remote controller
Control	RS232/RS485/USB/Remote
Video Port	USB2.0
Input Voltage	DC12V, 1A
Camera Size	148mm x 132mm x 161mm
Package	280mm x 240mm x 240mm
Pacage content	Camera, Romote, RS232 cable, USB2.0 cable, Power adapter

***** Product specification are subject to change without notice *****