




Features

- ※ Wide FOV: UHV-200-U2 adopts 83° large angle and small distortion lens, to present an open vision
- ※ Superb High-definition Image: UHV-200-U2 employs 1.2.9 inch 2.07 Megapixel high quality CMOS sensor, resolution is up to 1920 x 1080 with frame rate up to 30fps
- ※ Low Noise and High SNR: Low Noise CMOS effectively ensure high SNR of camera video
- ※ Multiple video compression: support H.264 / MJPEG, YUV video compression to made video play smoothly
- ※ Stereo sound: Built-in pick-up to present clear stereo sound effect, no need to connect external device
- ※ USB 2.0 interface: Plug and Play function is better for power supply and upgrading
- ※ Multiple installation: Easy to install on any device, LCD screen, Laptop, table or tripod
- ※ Wide Application: personal video conferencing, live video conference, collaboration meeting etc.
- ※ Convenient to operate: No need to download driving device, see as below:

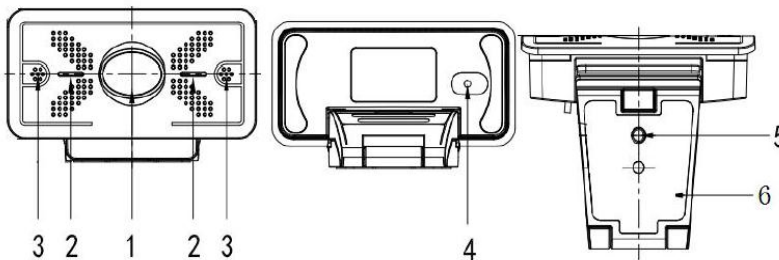

1. Lens(auto focus)
2. Indicator Light
3. Audio in (Built-in pick-up)
4. USB2.0 output hole
5. Bracket installation hole
6. Fixation clamp

Technical Specification

Model No.	UHV-200-U2
Camera Parameter	
Sensor	1/2.9" high quality HD CMOS sensor
Effective Pixelsl	16:9, 2.07 Megapixel
Video Format	950X540/160X90/320X180/432X240/640X360/800X488/800X600/864X480/960X720/1024X576/1280X720/1600X896/1920X1080/2304X1296X2304X1536/272X144/368X208/384X216/480X272/624X352/912X512/424X240/480X270/484X480/640X480/352X288/320X240/176X144/160X120/P30
Digital Zoom	10X
View Angle	83°(Pan) 53.1(Tilt)
Min.Illumination	0.5Lux(F1.8, AGC ON)
Focus	Auto
Aperture	Fixed
Backlight contrast	ON / OFF
Exposure	Exposure parameter could be adjusted; support auto exposure
Video Adjustment	Brightness, Color, Saturation, Contrast, White balance mode, Gain, Anti-flicker, low brightness compensation etc.
SNR	Above 50dB
Input/Output Interface	
Video Interfaces	USB 2.0(Power supply, upgrading available)
Video Compression Format	H.264, YUV, MJPEG
Audio Input Interface	Built in omnidirection high sensitive digital pick-up
Other Parameter	
Input Voltage	5V
Input Current	500mA(Max.)
Power Consumption	2.5W
Store Temperature, Humidity	- 10°C - +60°C, 20% - 95%
Working Temperature, Humidity	-10°C - +50°C, 20% - 80%
Dimension(WxHxD)	112mm x 65mm x 93mm
Weight(appx.)	0.25kg
Application	Indoor

*** Product specification are subject to change without notice ***